

ZEAS

CONDENSING UNIT

The ZEAS condensing unit, for medium and low temperature refrigeration, saves energy with complete equipment. Its silent operation makes it the most suitable option for possible neighborhood problems.

TEMPERATURE RANGE: -45° C to +10° C

APPLICATION: < 400 M2 / < 600 M2


- ✓ Compact unit. Reduced footprint.
- ✓ Reduces energy consumption up to 35%.
- ✓ Silent and discreet operation.
- ✓ Night mode.
- ✓ Connection to third party systems.
- ✓ Reduced environmental footprint.
- ✓ Reduced weight.
- ✓ Fully equipped.

- » SELF-SERVICES.
- » SUPERMARKETS.
- » RESTAURANTS.
- » SMALL INDUSTRY.
- » WORKING ROOMS.
- » REFRIG. / FROZEN FOODS WAREHOUSES.




FEATURES

- Perfect solution for variable load applications.
- Especially indicated for use in SUPERMARKETS, cold rooms and freezers ...
- The DC inverter scroll compressor with economizer function provides a high-energy efficiency and a reliable performance
- Reduction of CO2 emissions thanks to the use of R-410A refrigerant and the low energy consumption..
- 2 ZEAS units can be combined and use a single refrigerant pipe.
- Allows connection to low temperature cabinets or chambers with a booster unit.

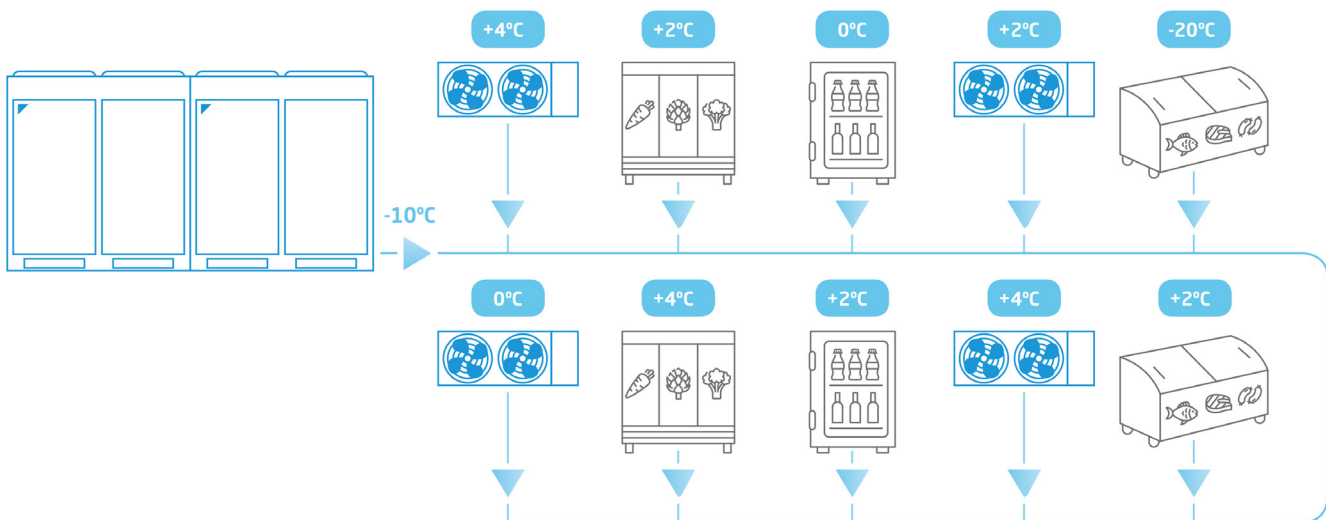

BOOSTER FOR LOW TEMPERATURE

Allows the connection of low temperature cabinets or chambers to the ZEAS medium temperature outdoor unit or to a Conveni-Pack (from -20 C to -45 C).

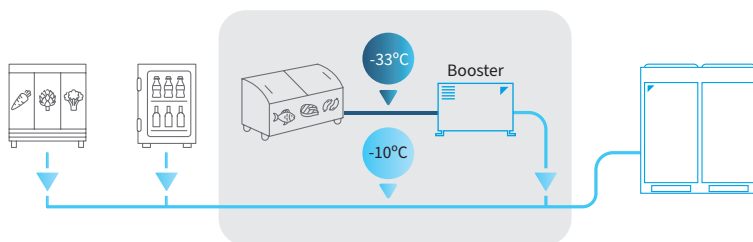

Booster unit

